


Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	1 of 9		Publish Date	Feb. 10, 2025	

● FUNCTIONS

1. Tilt Angles: 30° within a 360° radius
2. Suitable for vertical PCB
3. Vibration Detecting

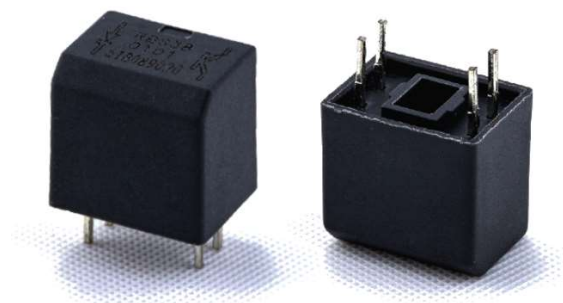

● APPLICATIONS

1. Rotation detection for LCD monitor
2. Automatically shut off for home appliances
3. Automatically shut off for Sporting equipment
4. Automatically shut off for motorbike
5. Alarm system
6. Anti-theft / Anti-tamper devices
7. Being motion detection (personal locator)
8. Wake up systems for power saving, such like remote controllers
9. Earthquake Detecting



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	2 of 9		Publish Date	Feb. 10, 2025	

● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. RoHS compliance, an ideal substitute for mercury switch.
6. A more economical tilt and vibration detection option than IC design solution.
7. All made in Taiwan and examined before shipment.

● PATENTS

1. Taiwan Patent No. M 450817
2. Taiwan Patent No. M 529259
3. Taiwan Patent No. I 553684
4. Taiwan Patent No. I 359430
5. Taiwan Patent No. I 584326
6. Taiwan Patent No. I 451463
7. Europe Patent No. EP 2157591
8. U.S.A Patent No. US 9,863,802 B2
9. China Patent No. ZL 200820126206.9
10. China Patent No. ZL 201620373881.6
11. China Patent No. ZL 201220539712.7
12. Japan Patent No. 3148127



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	3 of 9		Publish Date	Feb. 10, 2025	

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ± 0.25 mm)

Fig. 1

RBS 38 01 01		Operation Diagram	
		[Tilt Angle : 30°] The switch angle is an average value rather than an absolute value. The angle deviation of switch angle may occur due to the inconsistent test conditions (such as test environment and speed, etc.). Therefore please confirm whether it is applicable. ■ ON : Light Channel Open, $I = I_c$ □ OFF: Light Channel Close, $I = I_{ceo}$ ▨ Uncertain	
P.C.B. Layout(DIP)/Top View		Application Circuit	



2024/03/05(RDF1-070)

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	4 of 9		Publish Date	Feb. 10, 2025	

● Current/Voltage Suggested

Input Current	Operating Voltage	Conditions
10 mA	3.3 V	$V_{CE}=3.3V$ $R_D=200\text{ ohm}$ $R_L=75K\text{ ohm}$
10 mA	5 V	$V_{CE}=5V$ $R_D=390\text{ ohm}$ $R_L=100K\text{ ohm}$

* Please refer to above Application Circuit for designing electrical circuit.

● Absolute Maximum Rating ($T_a=25^{\circ}C$)

Item		Symbol	Rating	Unit
Input	Power Dissipation	P_d	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	100	mW
	Collector Current	I_C	20	mA
	C-E Voltage	V_{CEO}	30	V
	E-C Voltage	V_{ECO}	5	V
Operating Temperature		T_{opr}	-25~+85	$^{\circ}C$
Storage Temperature		T_{stg}	-40~+85	$^{\circ}C$
Soldering Temperature (*1)		T_{sol}	260	$^{\circ}C$

(*1) $t=5\text{ Sec}$



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	5 of 9		Publish Date	Feb. 10, 2025	

● Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20mA$	-	1.2	1.5	V
Reverse Current	I_R	$V_R=5V$	-	-	10	μA
Peak Wavelength	λ_p	$I_F=10mA$		940		nm
Dark Current	I_{ceo}	$V_{CE}=10V$	-	-	20	μA
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=0.25mA$ $I_F=20mA$	-	-	0.4	V
Light Current	I_C	$V_{CE}=5V$ $I_F=20mA$	0.5	5	-	mA
Rise Time	T_r	$I_C=0.8mA$ $V_{CC}=30V$ $R_L=1K\Omega$	-	5	-	μsec
Fall Time	T_f		-	5	-	μsec
Operation Diagram	θ	Fig.1	15	30	45	$^{\circ}$



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	6 of 9		Publish Date	Feb. 10, 2025	

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

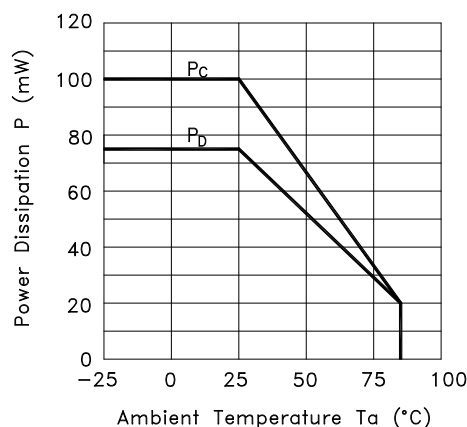


Fig.2 Forward Current vs. Forward Voltage

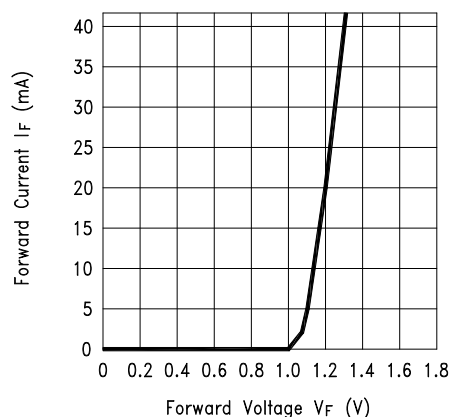


Fig.3 Collector Current vs. Collector-emitter Voltage


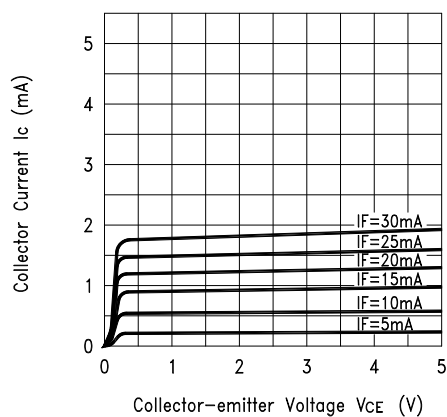


Fig.4 Collector Current vs. Ambient Temperature

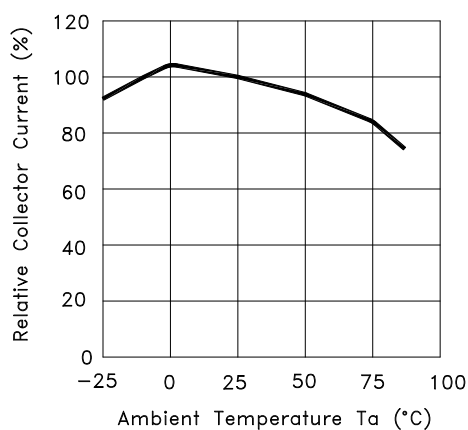


2024/03/05(RDF1-070)

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	7 of 9		Publish Date	Feb. 10, 2025	

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

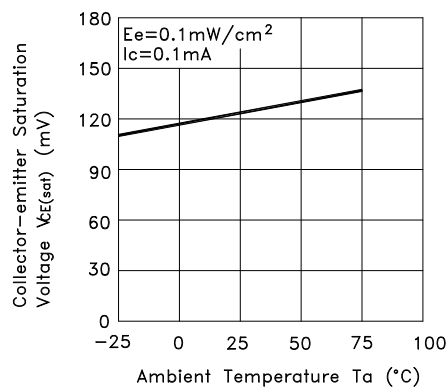

● RELIABLE TEST ITEMS

Reliable Test for RBS380101

	Test Item	Test Content
1	Operation Temperature	-25°C ~ 85°C
2	Storage Temperature	-40°C ~ 85°C
3	Humidity	40 °C / 95 %RH
4	Mechanical Life	2Hz, horizontal 1,000,000 times
5	Electrical Life	$I_F=20\text{ mA}$, $V_{CE}=5\text{ V}$ TIME: 30,000 hrs



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	8 of 9		Publish Date	Feb. 10, 2025	

● SOLDERING CONDITION


Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition Suitable Production Process	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Type
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	300±5°C	< 3 seconds max.	30W or Temperature- controlled manual soldering	DIP

● PACKAGE

	Part Number	Package	Quantity	Total	Dimension (mm)
1.	RBS380101	IC tube	48 pcs	48 pcs	525L*10W*17.5H
		Inner box	84 tubes	4,032 pcs	539L*130W*130H
		Outer carton	4 boxes	16,128 pcs	551L*285W*288H

※ Package shown as below for reference.

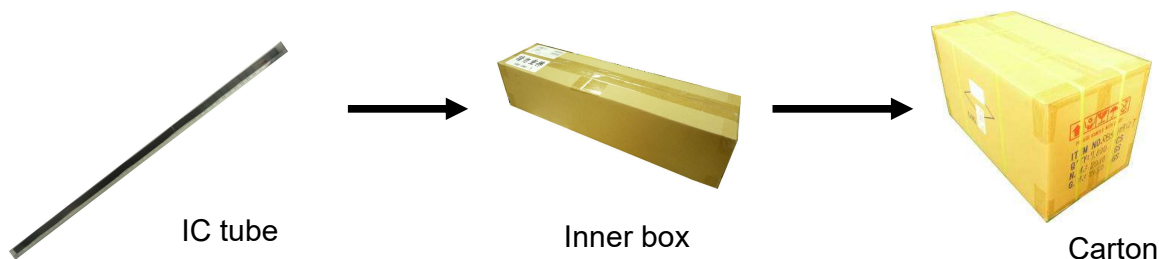

2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw

Product Specifications

Item No.	RBS380101	Description	Photoelectric Tilt Sensor Switch	Version	5
Page	9 of 9		Publish Date	Feb. 10, 2025	

● NOTES

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.
3. The product conduction time may be affected by external environmental conditions or vibration, resulting in discontinuous conduction.

● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. Please follow the soldering instruction accordingly, otherwise might lead to defective.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).
8. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, and grounding machinery etc.



2024/03/05(RDF1-070)

No.1, Jingke 3rd Rd., Nantun Dist.,
Taichung City 40852, Taiwan
<http://www.oncque.com>

Tel: +886-4-2358-8178
Fax: +886-4-2358-3555
E-mail: oncque@oncque.com.tw